


# ACCUKABEL

## ACCUKABEL:

1x16 mm<sup>2</sup>, 1x25 mm<sup>2</sup>, 1x35 mm<sup>2</sup>, 1x50 mm<sup>2</sup>, 1x70 mm<sup>2</sup>,  
1x95 mm<sup>2</sup>, 1x120 mm<sup>2</sup>

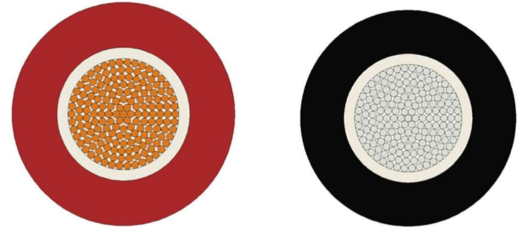

## CONSTRUCTION

Conductor	Electrolytic/ Tinned Annealed Copper (Class 6)
Insulation	PVC (Natural)
Sheath	NBR PVC (RAL 3000 Red / RAL 9005 Black)
Cable Diameter (± 5%)	16 mm <sup>2</sup> : 9.20
	25 mm <sup>2</sup> : 10.40
	35 mm <sup>2</sup> : 11.30
	50 mm <sup>2</sup> : 13.10
	70 mm <sup>2</sup> : 15.30
	95 mm <sup>2</sup> : 17.40
120 mm <sup>2</sup> : 19.60	

Bending Radius: x10 external diameter for fixed layings

## CABLE MARKING

DGR [CROSS SECTION] IEC 245-6 WW/YYYY CE [METER MARK] [LOTNO-PART NO]



## TECHNICAL AND ELECTRICAL PROPERTIES (20 °C)

Operating Voltage	0.6/1 kV
Test Voltage	3.5 kV
Temperature Range	-40°C + 70°C

